

3M™ Protecta® Comfort Belt Style Fall Arrest Suspension Harness with 2 attachment points

Part number(s):

1161765 Medium/Large (M/L)

1161764 Small (S)

1161766 X-Large (XL)

Description

Sub-brand:	Protecta®
Industry:	Various
Applications:	Rope access, suspension, rescue

Features

Rear fall arrest attachment point:	<ul style="list-style-type: none"> Large cranked D-ring <ul style="list-style-type: none"> Steel - zinc plated black electro-deposition paint
Front fall arrest attachment point:	<ul style="list-style-type: none"> Standard D-ring <ul style="list-style-type: none"> Steel - zinc plated black electro-deposition paint
Work positioning attachment points:	<ul style="list-style-type: none"> Large cranked D-ring <ul style="list-style-type: none"> Steel - zinc plated black electro-deposition paint
Suspension attachment point:	<ul style="list-style-type: none"> Large cranked D-ring <ul style="list-style-type: none"> Steel - zinc plated black electro-deposition paint
Buckles:	<ul style="list-style-type: none"> Legs; Quick connect buckles <ul style="list-style-type: none"> Steel - zinc plated, black electro-deposition paint
Adjustment:	<ul style="list-style-type: none"> Shoulders, legs, waist Pass through buckles <ul style="list-style-type: none"> Steel - zinc plated black electro-deposition paint
Webbing:	45 mm polyester – water and dirt resistant
Thread:	Polyester
Additional features:	<ul style="list-style-type: none"> Front and rear fall indicators Dorsal/shoulders, hips and leg padding 2x auto-resetting lanyard keepers Gear tool loops Hook and loop web ends Protected labels
Weight capacity:	140 kg
Operating temperature:	-35°C +57°C
Standards:	CE EN 361:2002; EN 358:2018; EN 813:2018




Front



Back

3M™ Protecta® Fall Arrest Harness sizing chart

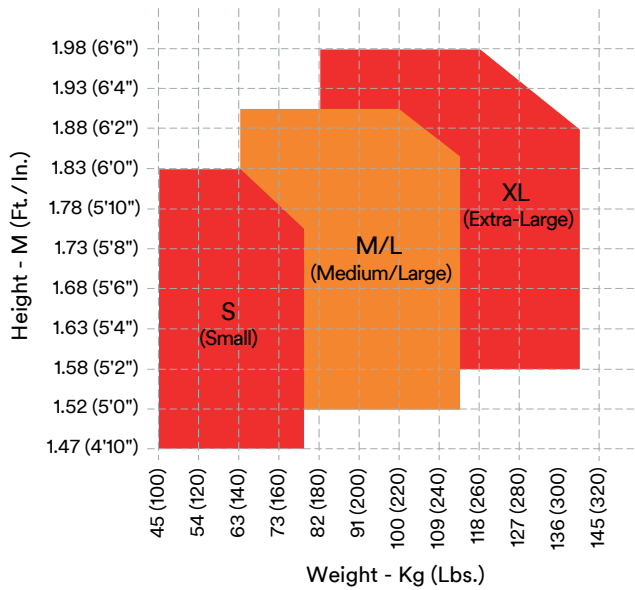

Weight

	←.....→	⚖️ kg
1161764	Small (S)	2.49
1161765	Medium/Large (M/L)	2.65
1161766	X-Large (XL)	2.75

Important notice

The mounting and use of the product described within this document assumes that the user has previous experience of this type of product and that it will be assembled by a competent professional according to product documentation. Before any use of this product it is recommended to complete some trials to validate the performance of the product within its expected application.

All information and specification details contained within this document are inherent to this specific 3M product and would not be applied to other products or environment. Any action or usage of this product made in violation of this document is at the risk of the user.

Compliance to the information and specification relative to the product contained within this document does not exempt the user from compliance with additional guidelines (safety rules, procedures). Compliance to operational requirements especially in respect to the environment and usage of tools with this product must be observed. The 3M Group (who cannot verify or control these elements) would not be held responsible for the consequences of any violation of these rules which remain external to its decision and control.

Warranty conditions for products are determined with the sales contract documents and with the mandatory and applicable law, excluding any other warranty or compensation.

3M Fall Protection

Capital Safety (Northern Europe) Limited
3M Centre, Cain Road
Bracknell, Berkshire, RG12 8HT, UK

Capital Safety Group (EMEA)
Le Broc Center, Bâtiment A, Z.1. 1re Avenue – BP15
06511 Carros Le Broc, Cedex, FRANCE

Phone +33(0)4 83 58 08 08 Email informationfallprotection@mmm.com Web 3M.com/FallProtection

Please recycle. Printed in the UK. © 3M 2020. 3M and Protecta are trademarks of 3M Company. All rights reserved. OMG73394



Fall Protection